












LED CANOPY LIGHT

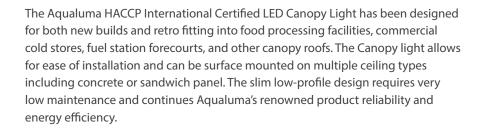

SPECIFICATIONS

LED Light Source	Lumileds
Colour Temp (Tc)	5000 Kelvin
CRI	CRI 75
Luminous Flux	from 13,500lm to 23,095lm
LED Current / LED	90W, 125W, 165W
Input Voltage	90V-277V 47-63Hz
Warranty	5 year
Lens Options	Diffused
Control Options	Intelligent control options available
Mounting Options	Surface mount or with stand off frame








ISO 9001:2015 CERTIFIED



- Provides lighting for food preparation facilities, commercial cold stores and service station forecourts
- 90W, 125W & 165W versions available
- Output flux from 13,500lm to 23,095lm
- Luminaire efficacy up to 150lm/W
- 6063 T5 aluminium, white powder coated and ABS componentry
- 5 year warranty
- Instant on / off
- · Food Grade certification
- IP65 rated
- · IPART and VEET approved
- Flicker free





















MECHANICAL INFORMATION

Weight: Slimline=6.5kg / with stand off frame=8kg **Mounting:** Surface mount or with stand off frame **Cabling:** 1.5m cable rated to -40 $^{\circ}$ C to 75 $^{\circ}$ C (std) Housing: 6063 T5 aluminium, white powder coated and

polycarbonate componentry **Lens:** Impact resistant acrylic (standard)

ELECTRICAL SPECIFICATIONS

Operating voltage: 90-277VAC, 47-63Hz

Power factor: $\lambda > 0.96$

Operating Temperature: -40 ° C to 45 ° C

