




KOTZUR

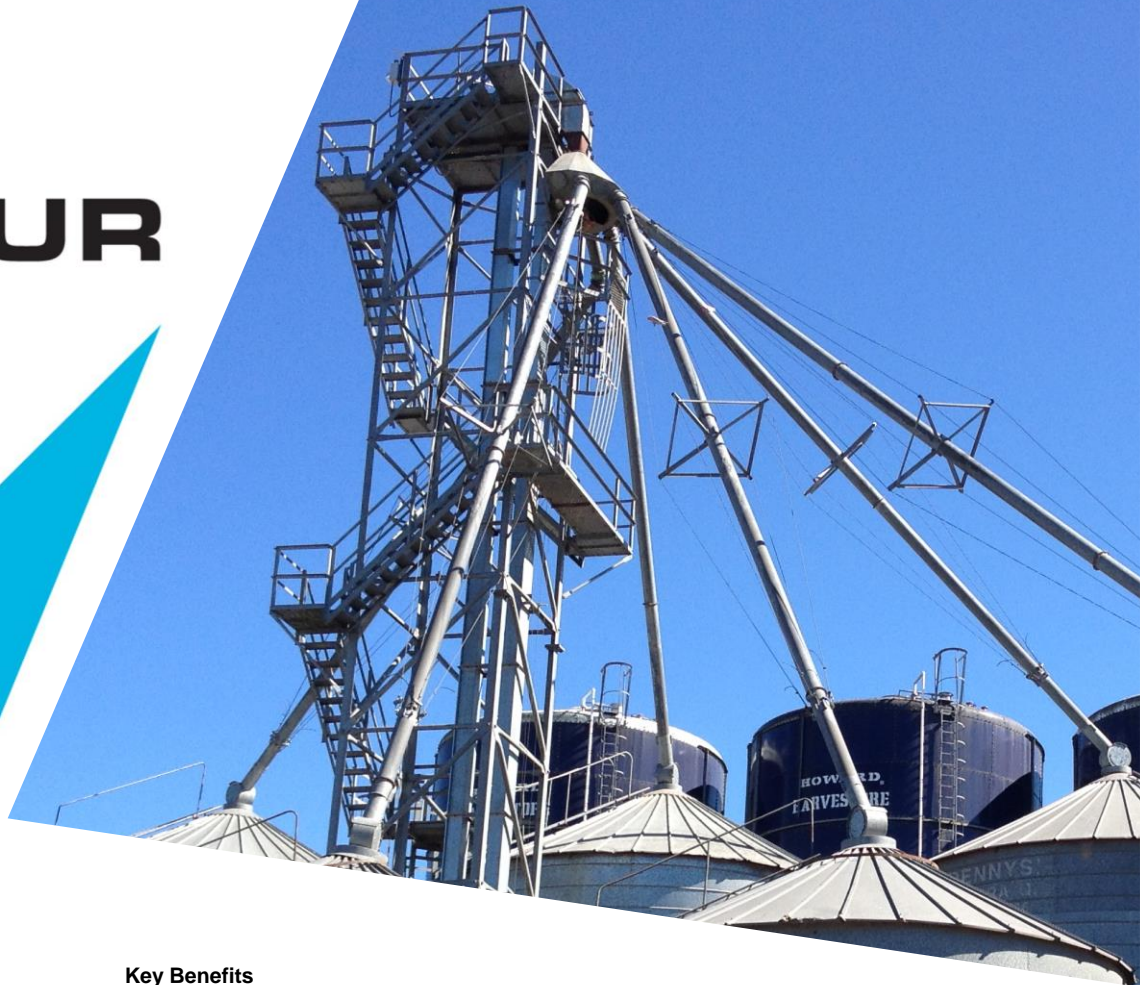

SPOUTING

Kotzur Bulk Solids Handling Spouting is used where material is transferred by gravity.

Key Benefits

- Utilizing gravity to convey materials,
- No moving parts,
- Often reduces the number of conveyors required in a system,
- Lining options for high wear areas,



TUBULAR SPOUTS




- Option to Polyurethane lined to reduce wear,
- Trussed to increase spans,
- Rotatable 90° increments to increase life.

Models

Ø168
Ø 219
Ø 273
Ø 324
Ø 356



CUSHION STOP

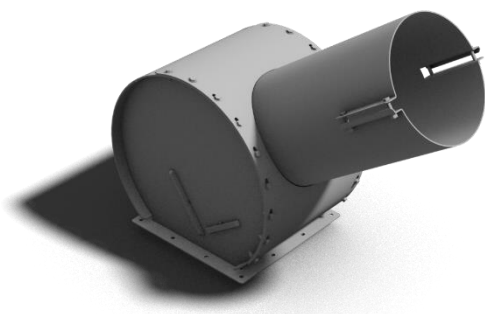

- Option to tile line to reduce wear,
- Hot dipped galvanised to reduce corrosion,
- Adjustable to suit spout angle,
- Aid in the central filling to prevent silo structural failure,
- Replaceable hardened impact plate

Models

Ø168
Ø 219
Ø 273
Ø 324
Ø 356

RETARDER



- Option to tile line to reduce wear
- Designed to reduce material velocity in steep spouts to reduce wear and material damage.

Models

Ø168
Ø 219
Ø 273
Ø 324
Ø 356